

PLB202

High auto loader

● Capacity

Power		3phases 200V 60Hz	3phases 220V 60Hz	3phases 200V 50Hz
Blower capacity	Output	1.75 kW	1.75 kW	1.50 kW
Carry performance *1		410 kg/h		

*1 It is the value which used of bulk specific gravity 0.65 g/cm³ virgin material for level 9m and perpendicular 3 m and Ø 38 mm hose piping, and was measured in our company.

And this value is the case where a supply place is a vacuum cyclone PS1. (at 60 Hz)

● Standard specifications

Dust collecting method	Body	Dust filter box	
	Filter	Dust filter	
Material supply exchange	Body	Air selector	
	Connecting port	2 x Ø 38 mm	
Safety device	Error contents	Safety device	Error notification mode
	Earth leakage	Earth leakage circuit breaker	Power OFF
	Overload	(with overload protector)	
	Phase reversal	Reverse phase protection relay	Display lamp+Operation stop
	Blower motor overload	Overload relay	Display lamp+Operation stop
	Clean filter	Notification timer	Display lamp
Colour *2	A45-90A (Gloss)		

*2 The colour (paint colour) may be changed according to the customer's request.

● Accessories

Power cord	3.5m
Hose	Ø38 mm x 20 m (L) (without earth wire)
Hose band	8 pieces for Ø 38 mm hose

● Utilities

Power		3phases 200V 60Hz	3phases 220V 60Hz	3phases 200V 50Hz
Electric capacity		1.75 kW	1.75 kW	1.50 kW
Rated current		7.5 A	7.1 A	5.9 A
Earth leakage circuit breaker capacity		15 A		
Air	Pressure	0.2 MPa		
Size		W 536 x D 529 x H 1147 (mm)		
Weight *3		65 kg		

*3 Weight of a standard model


□ Specification may be changed without prior notice.



PLB202

High auto loader

● Outline view

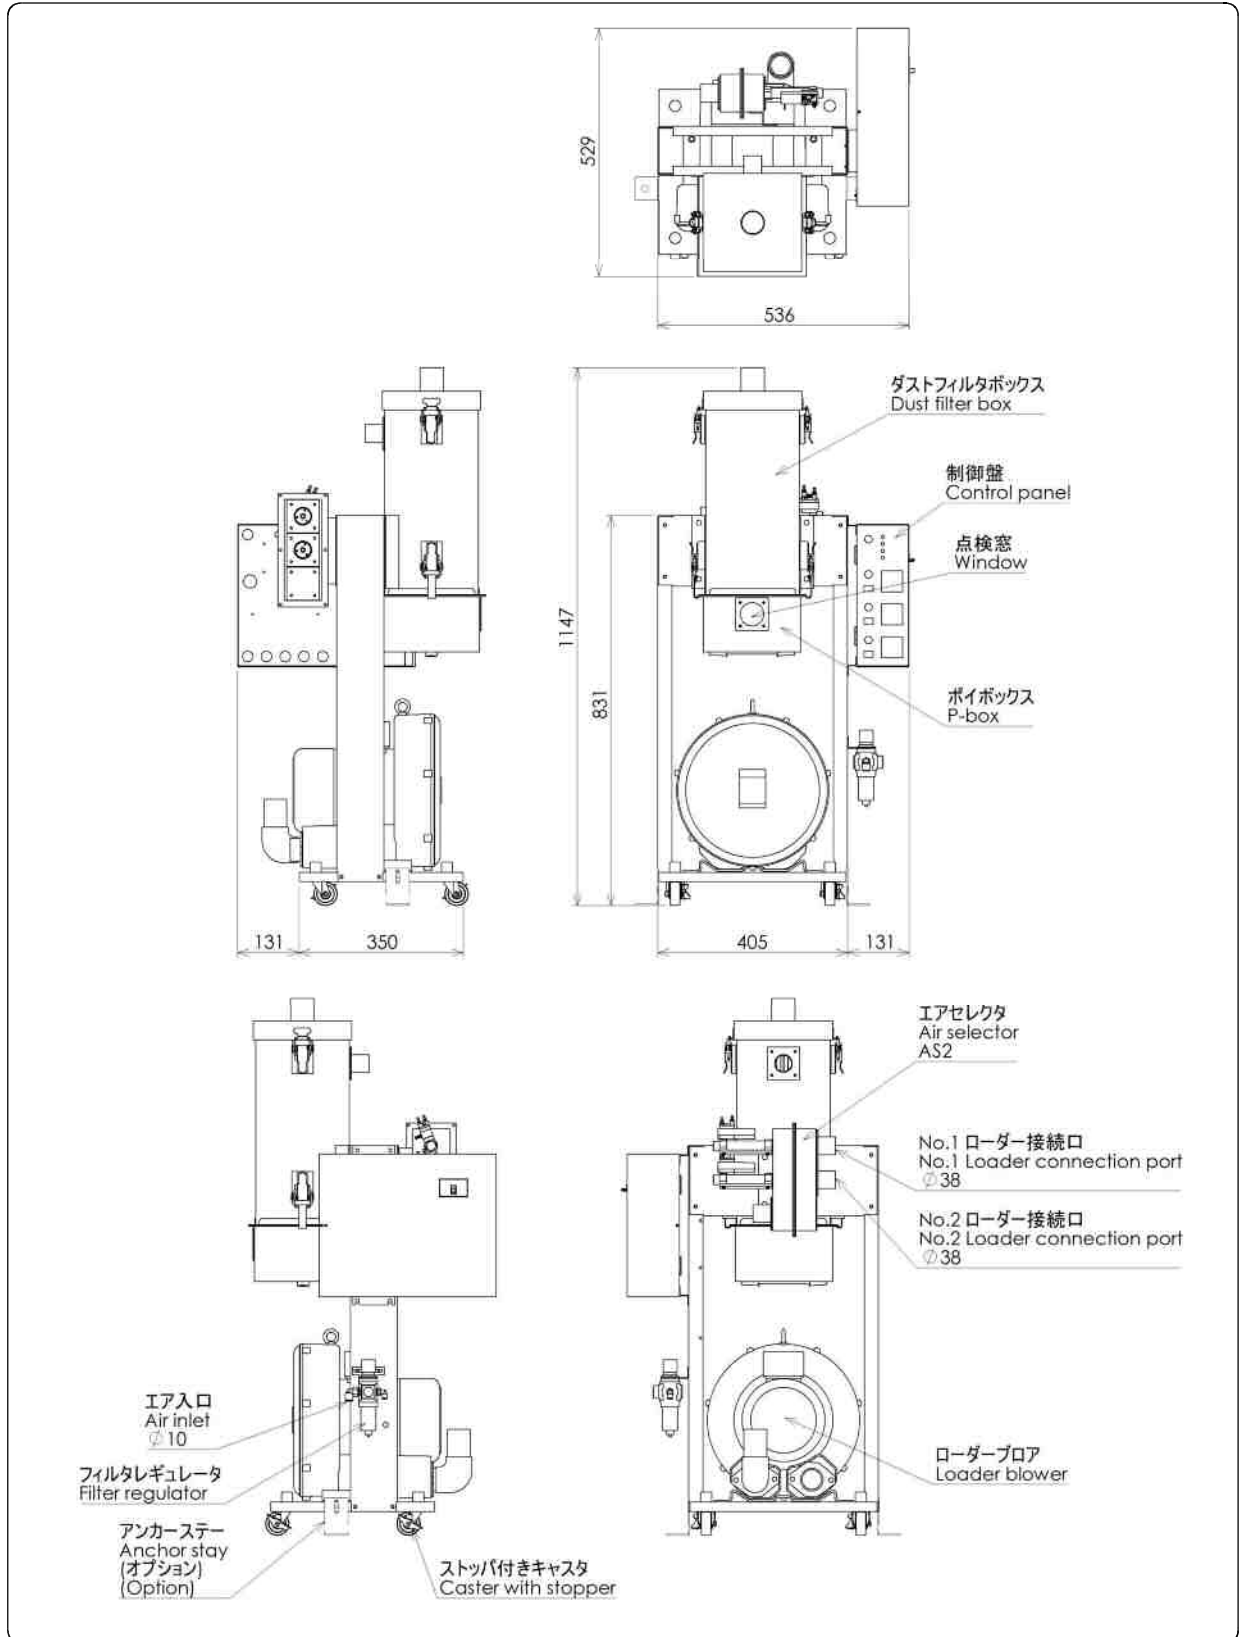

□ Specification may be changed without prior notice.

