

WTE40A

TRYMAX

Mould Temperature Controller

●Capacity

Power		3-phase,200V,60Hz	3-phase,220V,60Hz	3-phase,200V,50Hz
Temperature range *1		Supplied water temperature + 10 to 90 °C		
Temperature control accuracy *1		Preset temperature ± 1 °C		
Pump	Electric capacity	1.28 kW		0.74 kW
	Flow capacity	4.8 m ³ /h at a head of 35 m		4.8 m ³ /h at a head of 23 m
Heater	Electric capacity	6.61 kW	8.00 kW	6.61 kW
Cooling capacity *2		12.8 kW (46.0 MJ/h)		

*1 The temperature of medium is measured by us with a temperature indicator controller used during no-load operation.

*2 This capacity is achievable when the machine is fed with cooling water of which the temperature is lower than that of the medium by 45 °C and run in the state that the pressure difference between the water supply side and the water drain side is 0.2 MPa.

●Standard specifications

Medium		Clean water (soft water)		
Pump		Mechanical seal type		
Heater	Tank material	FC200 + Electroless nickel plating		
	Tank capacity	1 L		
Cooling	Method	Direct cooling by direct supply of clean water		
Temp. control	Setting / Display	Digital setting / Digital display		
	Control method	PID control for heating/cooling		
	Sensor *3	Thermocouple (J)		
Start timer *4		Subtractive timer, 00 h:01 m—99 h:59 m		
Piping connection	Cooling water supply port *5	Hose nipple, 10.5 mm dia.		
	Cooling water drain port *5	Hose nipple, 10.5 mm dia.		
	Medium feed port *5	Hose nipple, 12.7 mm dia.: 4 pieces		
	Medium return port *5	Hose nipple, 12.7 mm dia.: 4 pieces		
Safety device	Error contents	Safety device	Error notification mode	
	Earth leakage	Earth leakage circuit breaker	Power OFF	
	Overload	(with overload protector)		
	Reversed phase	Reverse phase protection relay	Alarm lamp + Buzzer + Operation stop	
	Overheat	Overheat protector	Alarm lamp + Buzzer + Operation stop	
	Level low	Level switch	Alarm lamp + Buzzer + Operation stop	
	Pump overload	Overload relay	Alarm lamp + Buzzer + Operation stop	
	Maximum temperature	Control panel (with standby function)	Alarm lamp + Buzzer	
	Minimum temperature	Control panel (with standby function)	Alarm lamp + Buzzer	
	Sensor breaking	Control panel	Alarm lamp + Buzzer + Operation stop	
	Heatup error	Control panel	Alarm lamp + Buzzer + Operation stop	
	Power failure *4	Control panel	Timer lamp blinking + Buzzer + Operation stop	
Paint colour *6	A45-90A (Gloss)			

*3 The sensor type may be changed according to the customer's request.

*4 If power failure occurs after the (subtractive) start timer has been set, the timer start is disabled even if the power supply is restored, to prevent accident.

*5 The connector type may be changed according to the customer's request.

*6 The colour (paint colour) may be changed according to the customer's request.

●Accessories *7

Power cord	5 m
Circulation line hose	12.7 mm dia., 3 m long, heat-resisting hose: 8 pieces
Hose band	Hose band for 12.7 mm dia. hose: 16 pieces

*7 The type, size or quantity of the accessories may be changed according to the customer's request.

●Utilities

Power	3-phase,200V,60Hz	3-phase,220V,60Hz	3-phase,200V,50Hz
Electric capacity	7.89 kW	9.28 kW	7.35 kW
Rated current	24.6 A	26.7 A	25.1 A
Circuit breaker capacity	40 A		
Air	Not required		
Cooling water	1.8 m ³ /h		
External dimensions *8	250 × 453 × 590 mm (W×D×H)		
Weight *9	52 kg		

*8 Pipes to the machine are not included.


*9 Weight of a standard model

WTE40A


TRYMAX

Mould Temperature Controller

●Flow

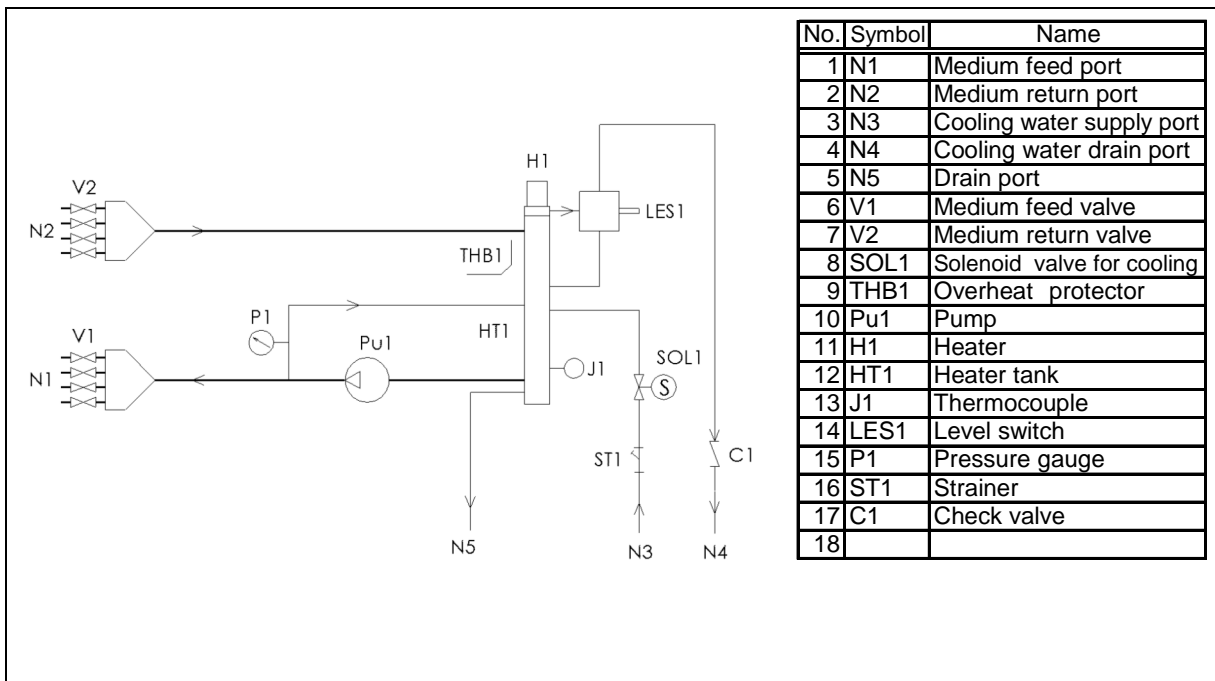

●Outline view

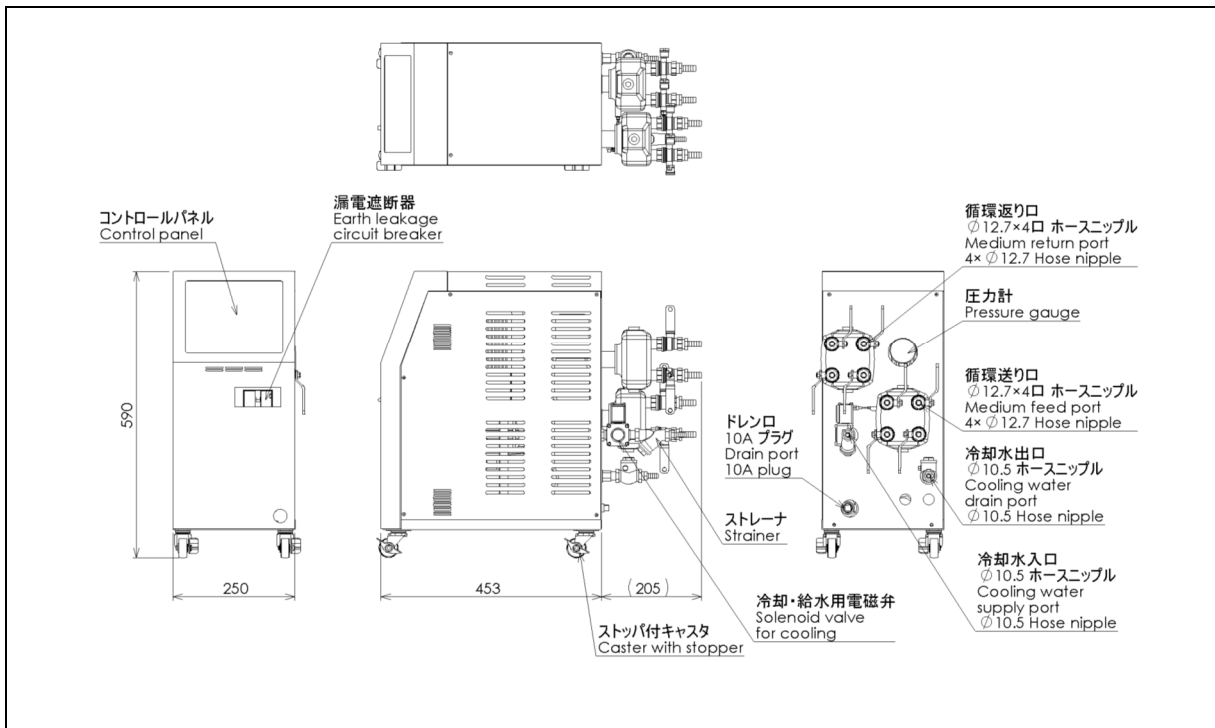

□Specification may be changed without prior notice.